

INSTALLATION MANUAL

Easy-Line Laundry Chute Systems

easy
line

Introduction

Dear Valid Customer,

We would like to congratulate you on your purchase of your new Easy-Line Laundry Chute System. You have chosen a high quality product „Made in Germany“.

Modern production facilities in Germany, selected materials and examined quality are the basis for the 5 year-guarantee (from original purchase date).

Enjoy your new Easy-Line Laundry Chute system!

Safety Instructions

Please read carefully through your Installation manual and follow the directions. Please keep your Installation manual in a safe place. You may need it in the future for other useful information and tips.



The Easy-Line Laundry Chute System is intended solely for private and not for industrial use.

The Easy-Line Laundry Chute System is intended solely for laundry.

Please notice the stated minimum height of laundry chute doors (1 m over finish floor level).

Installation Instructions


The encasing for the Laundry Chute is not included in the scope of supply.

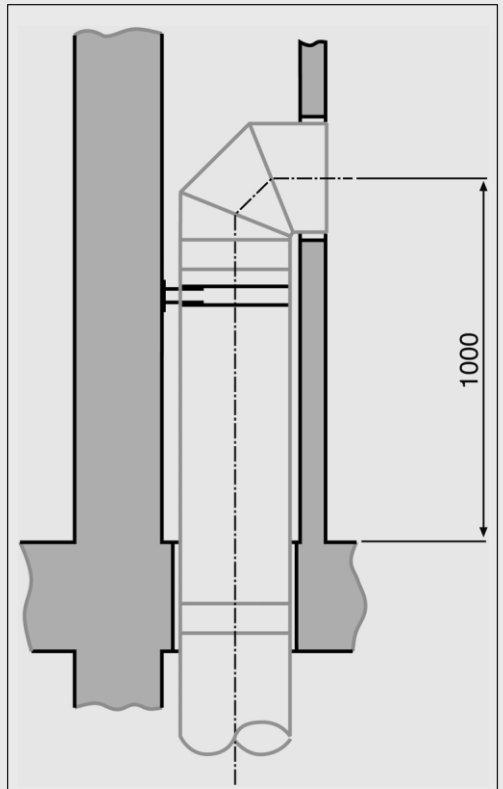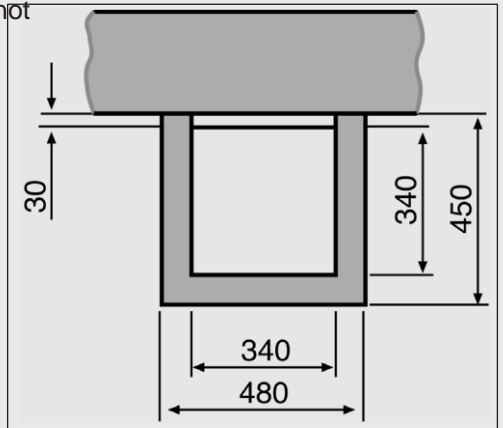

Installation

Start with the upper laundry chute door.

1. Fasten the first wall bracket on the wall about 60 cm above the floor.

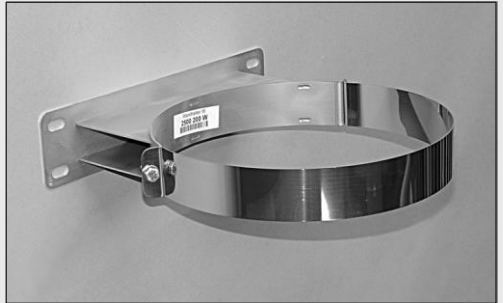

2. Place the 90° elbow into the pipe.



3. Fasten the pipe and the elbow with the wall bracket and align it to the preferred position. The distance from the middle of the elbow to the finish floor level should be at least 1 m (see picture on page 3).



4. Now you can plug the pipe together and connect them with the locking bands.



5. If you are going through a second ceiling, install another wall bracket and fasten the pipe.



Setting the Laundry Chute Door



After the laundry chute has been encased you are able to install the laundry chute door.

1. Sound insulation is glued to the connection piece of the laundry chute door.



2. Insert the laundry chute door and connect it to the encasement with 4 screws.


The laundry chute door can be installed in all direction.



Adjusting the child security mechanism

All laundry chute doors are equipped with a child security mechanism.

With a screw driver you can adjust the opening pressure on the latch. This will hinder children to be able to open the laundry chute doors.

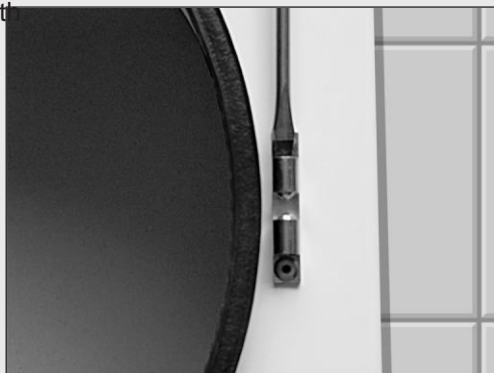

Registration Form

First Name: _____

Last Name: _____

Address: _____

City: _____

State/Province: _____

Postal/Zip Code: _____

Country: _____

Phone: _____

Fax: _____

E-mail address: _____

Date of Purchase: _____

Please complete, copy and email form back to us at ++49 (0) 63 48-95 96 1-11

Name of Supplier:

STRATHVAC CENTRAL VACUUM SYSTEMS SCOTLAND
65 OLD ROME DRIVE
SPRINGHILL MEADOWS
KILMARNOCK
KA1 2RU

TEL: 0800 678 1778

EMAIL: info@strathvac.co.uk

WEB: www.centralvacuumuk.co.uk

www.strathvac.co.uk

www.easy-line.de